

75-LCVEA Series



FEATURES:

- AC Input 100~277VAC
- Built-in Active PFC Function
- Protection: SCP / OVP / OTP / OCP
- Surge protection: L-N 6KV, L-FG/N-FG 4KV
- Flicker Free
- High Operating Ambient Temp.: -40°C~+55°C
- Safety: UL8750 ,Type TL, Type HL
- EMI: FCC / CE
- IP 67 Compliant
- Warranty: 5 years (refer to warranty policy)
- RoHS Compliant

PRODUCT SPECIFICATION

MODEL	DC OUTPUT POWER (W)	DC OUTPUT VOLTAGE (V)	OUTPUT CURRENT (A)	OUTPUT VOLTAGE TOLERANCE	EFFICIENCY (Typ.)				Power Factor (Typ.)			
					100VAC	120VAC	200VAC	277VAC	100VAC	120VAC	200VAC	277VAC
LCVEA075U240	76.8	24	3.2	±5%	84.0%	86.0%	87.0%	88.0%	0.99	0.98	0.97	0.92
LCVEA075U360	75.6	36	2.1	±5%	85.0%	87.0%	88.0%	89.0%	0.99	0.98	0.97	0.92
LCVEA075U420	75.6	42	1.8	±5%	86.0%	88.0%	89.0%	90.0%	0.99	0.98	0.97	0.92
LCVEA075U480	76.8	48	1.6	±5%	86.0%	88.0%	89.0%	90.0%	0.99	0.98	0.97	0.92
LCVEA075U540	75.6	54	1.4	±5%	86.0%	87.0%	89.0%	90.0%	0.99	0.98	0.97	0.92

Input Specifications

	Min.	Typ.	Max.	Units	Conditions/Description
Input Voltage Range	90		305	Vac	
Input Frequency Range	47		63	Hz	
Input Current			1	A	100VAC in
Inrush Current			65	A	230VAC in, 25°C Cold start
Leakage Current			0.75	mA	277VAC in
Power Factor (PF)	0.9				
Total Harmonics Distortion (THD)			20	%	100-277VAC, 100% load

Output Specifications

	Min.	Typ.	Max.	Units	Conditions/Description
Line Regulation			±3	%	
Load Regulation			±5	%	
Output Voltage Regulation			±5	%	N/A
Ripple and Noise (pk-pk)			0.54	V	20MHz Bandwidth. See note (3)
Turn-on Delay Time			1	s	*Measured at 100-277VAC and at full load

Protection Functions

	Min.	Typ.	Max.	Units	Conditions/Description
Short Circuit Protection					Auto recovery
Over Current Protection			160%	Io	Auto recovery
Over Voltage Protection					Latching, See individual models OVP levels
Over Temp Protection (Tc)					Latching, re-power on to recover

Environmental Conditions

	Min.	Typ.	Max.	Units	Conditions/Description
Operating Temperature (Ta)	-40		55	°C	Non-condensing
Operating Humidity	10		90	%RH	Non-condensing
Operating Case Temperature (Tc)			90	°C	Case temperature measured at the case hot spot Measured at 100Vac, Ta 55°C
Storage Temperature	-40		80	°C	Non-condensing
Storage Humidity	10		95	%RH	Non-condensing
Life Time	Measured at 277Vac, 45,000 hours at Tc 75°C for LCVEA075U540				
Dimensions(L*W*H)	232 * 46.5 * 31 mm 9.13 * 1.83 * 1.22 inch				
Weight			690	g	

75-LCVEA Series

EMC Compliance and Safety

EMC Compliance			
Conducted and Radiated Emission		EN 55015 (CISPR15) , FCC part 15 Class B	
Harmonic Current Emissions		EN 61000-3-2 Class C	
Voltage Fluctuations & Flicker		EN 61000-3-3	
EMS Standards	Electrostatic Discharge (ESD)	IEC 61000-4-2	8 KV air discharge, 4 KV contact discharge
	RF Electromagnetic Field Susceptibility	IEC 61000-4-3	
	Electrical Fast Transient	IEC 61000-4-4	
	Surge Immunity	IEC 61000-4-5	L-N 6KV, L-FG/N-FG 4KV
	Conducted RF Disturbances	IEC 61000-4-6	
	Power Frequency Magnetic Field	IEC 61000-4-8	
	Voltage Dips	IEC 61000-4-11	
Safety			
UL	UL8750 ,Type TL, Type HL		
PSE	Comply with PSE		

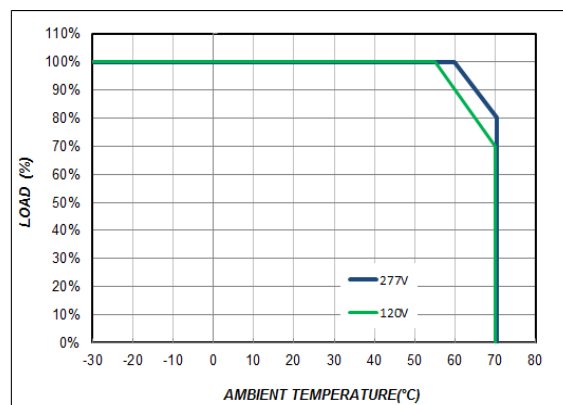
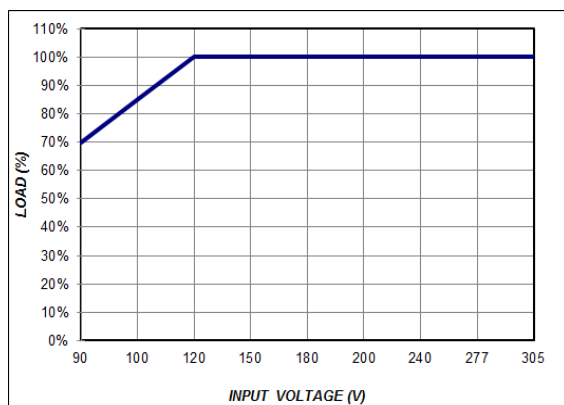
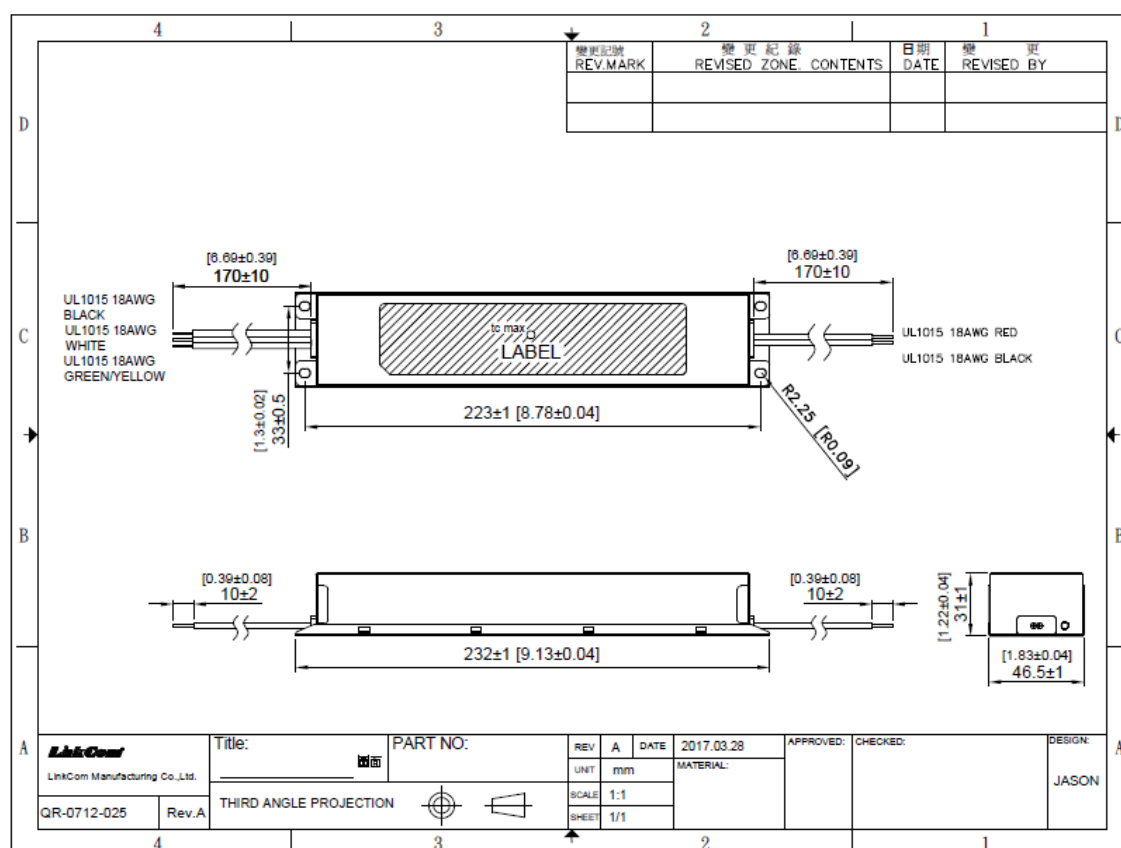
Notes

- (1) All parameters not specially mentioned are measured 277VAC input.
- (2) All specifications Typical @25°C , unless otherwise noted, at normal line and load.
- (3) Ripple and Noise measured directly at pins/terminals at nom. load, 0.1uF bypass and 47uF electrolytic, pk-pk @20MHz bandwidth.
- (4) Specified for free-air convection cooling.
- (5) Operating in minimum load is not proper requiremant

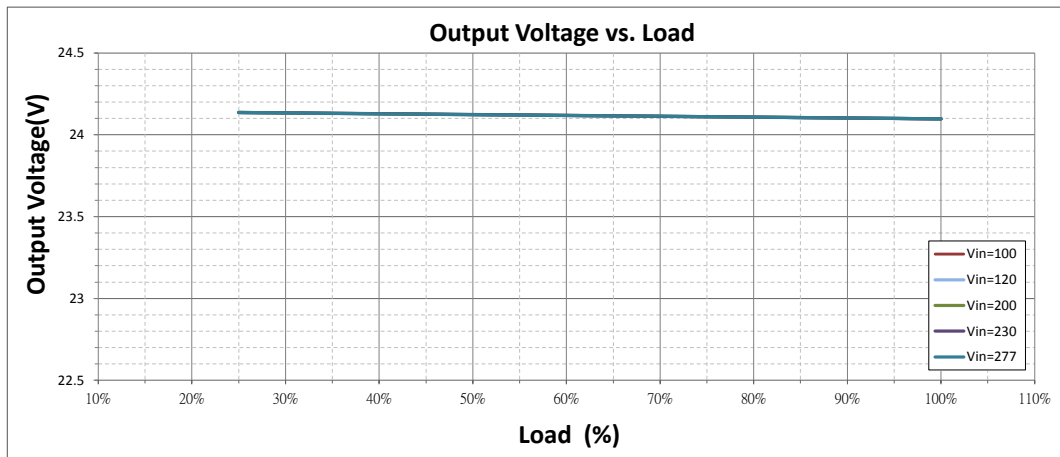
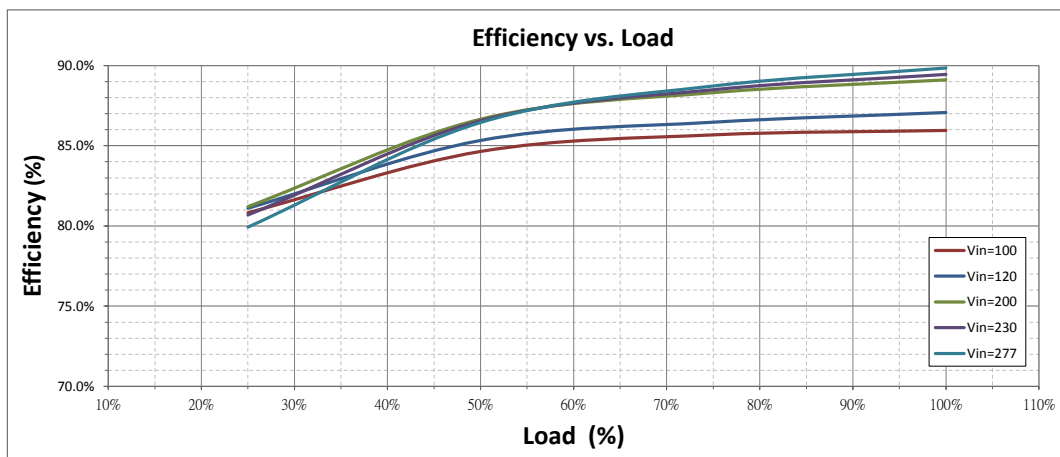
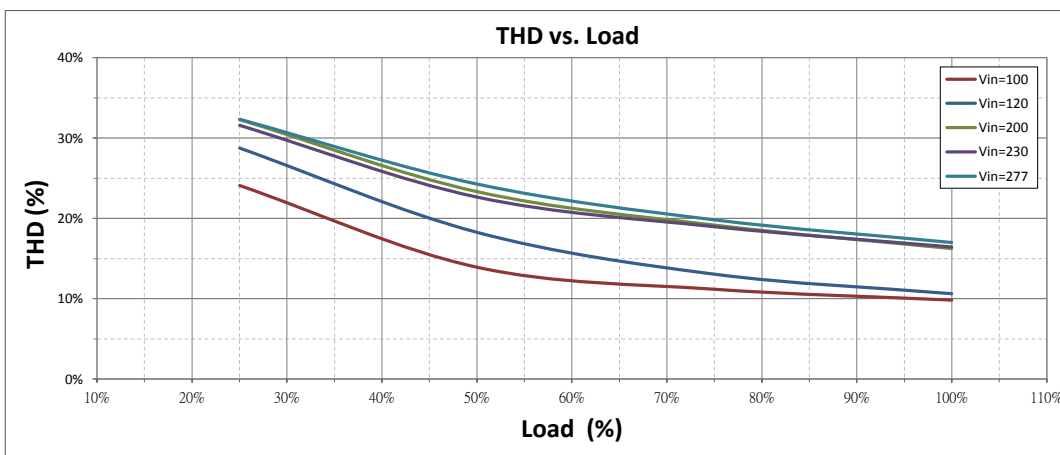
* REFERENCE: www.linkcom.com.tw

* Please contact sales@linkcom.com.tw, sales@linkcomusa.com for more information

75-LCVEA Series

DERATING CURVEDIMENSIONS* REFERENCE: www.linkcom.com.tw

75-LCVEA Series

Output Voltage vs. Load (LCVEA075U240)Efficiency vs. Load (LCVEA075U240)THD vs. Load (LCVEA075U240)

75-LCVEA Series

PF vs. Load (LCVEA075U240)

