


xDSL Transformer

- Designed to meet UL 60950-1 and IEC 60950-1 requirements for supplementary insulation
- RoHS Compliant
- Operating Temperature -40°C to +85°C



Electrical Specifications @25°C	
Inductance:	PIN 1-4 = 100uH $\pm 7\%$ @ 10KHz/0.1V/Series (PIN 2-3 Short)
Leakage Inductance:	PIN 1-4 = 950nH Max. @ 1MHz/0.1V (PIN 2-3, PIN 7-8-9-10 Short)
Turn Ratio:	PIN 1-4 : PIN 10-7 = $2.0 \pm 2\%$: 1 (PIN2-3, PIN8-9 Short)
T.H.D.	PIN 1-4 to PIN 10-7 = -90dB Max. @ 100KHz/3V (PIN 2-3, PIN 8-9 Short)
D.C.R.	PIN 1-4 = 1.1 ohm Max. (PIN2-3 short)
	PIN 10-7 = 0.8 ohm Max. (PIN8-9 short)
Hi-POT :	PRI. – SEC. =1875VAC/60Hz/1Second/1mA

Dimensions

(Units: $\frac{\text{Inches}}{\text{mm}}$, Unless otherwise specified, all tolerances are $\pm \frac{.010}{0.25}$)

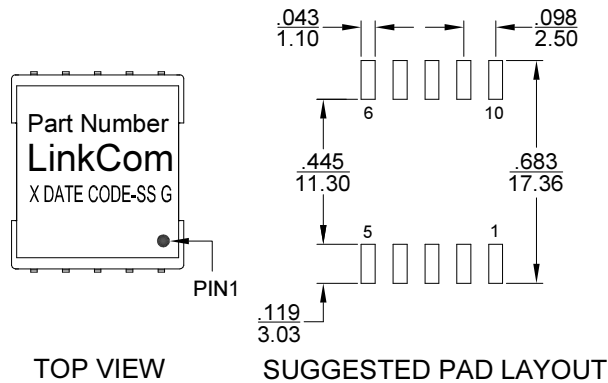

Schematic

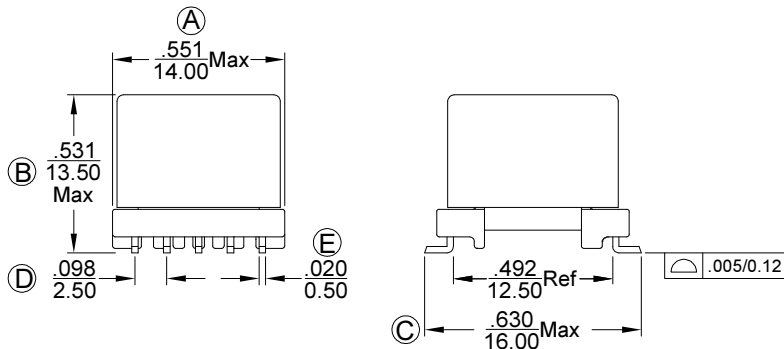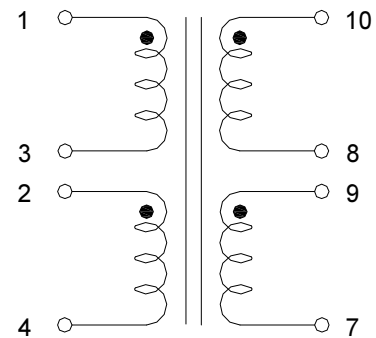

Mark

1. Part Number---LAL0573
2. X---PRODUCT LINE or BLANK
3. DATE CODE---YYWW
4. SS---60 OR BLANK
5. G---RoHS

There shall be no breakdown between winding 1,2,3,4 & 7,8,9,10 when tested according to ITU-T K.21:2011 enhanced level 6KV,per 2.1.1.b using the test procedures of K.44:2012