

G . Fast Transformer

- RoHS Compliant
- Operating Temperature -40°C to +85°C



Electrical Specifications @25°C

Inductance:	PIN 1-4 = 10uH Min. @ 100KHz/0.1V/Series
Insertion Loss:	1dB Max. @ 1-100MHz
Turn Ratio:	PIN 1-4 : PIN 8-5 = 1.25±2% : 1
Hi-POT	PRI. – SEC. = 3750VAC/2Sec/0.5mA

Dimensions

(Units: $\frac{\text{Inches}}{\text{mm}}$, Unless otherwise specified, all tolerances are $\pm\frac{.010}{0.25}$)

Schematic

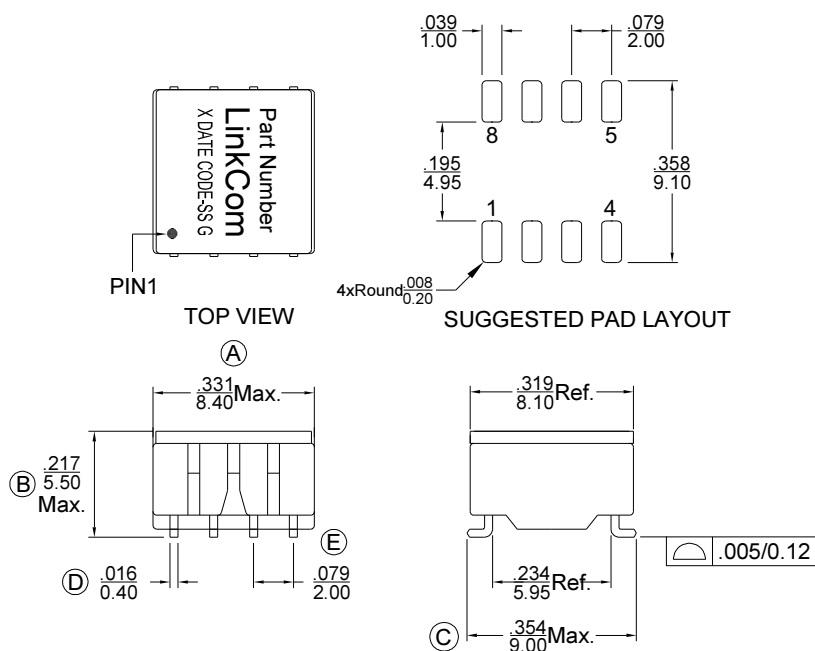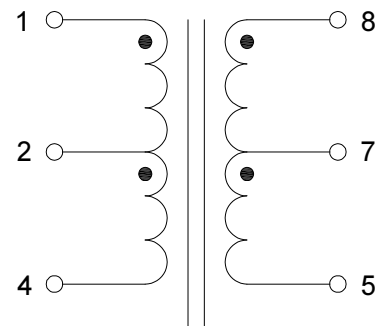

Mark

1. Part Number----LGT0102
2. X----PRODUCT LINE OR BLANK
3. DATE CODE----YYWW
4. SS----61
5. G----RoHS

Package info

LGT0102-61R - Tape Reel