

## Common Mode SMD Filter for Power Line

LCMF Series LCMF4520P1

### Features:

- Designed for noise suppression at DC power lines.
- Low profile (H = 2.0mm).
- Small size.
- High rated current.
- Operating temperature: -40°C ~ 85°C.

### Applications:


- Power line equipment like DC-DC converters, battery chargers.
- Portable equipment like PDAs, laptops, printers.

### Product Identification:

LCMF 4 5 2 0 P1 - 3 0 1 - 2P  
1            2            3            4            5



1. Series : LCMF= LinkCom Common Mode Filter
2. Dimension Code: 4.7mm x 4.5mm x 2.0mm
3. Shielding Type/Application P1=Power
4. Impedance Value 300Ω Typ.
5. Number of lines 2P=2-line

### Schematic:

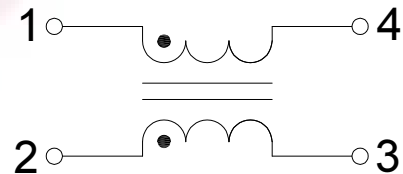


### Dimension(mm):

(Units:  $\frac{\text{Inches}}{\text{mm}}$ , Unless otherwise specified, all tolerances are  $\pm\frac{.010}{0.25}$ )

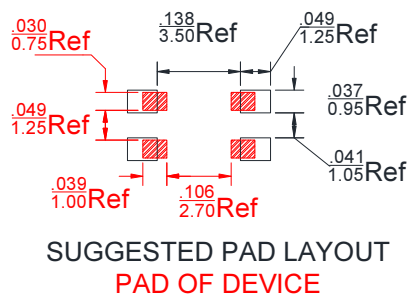

### Mark

XXX---- Impedance



## Common Mode SMD Filter for Power Line

LCMF Series LCMF4520P1

### Electrical Characteristics

Part Number	Common-Mode Impedance Z( $\Omega$ ) at 100MHz	D.C. Resistance ( $\Omega$ ) Max.	Rated Current (A) Max.	Rated Voltage Vdc (V)	Insulation Resistance (M $\Omega$ ) Min.	Mark
LCMF4520P1-301-2P	300 Typ.	0.045	3.0	50	10	301
LCMF4520P1-401-2P	400 Typ.	0.050	2.8	50	10	401
LCMF4520P1-421-2P	420 Typ.	0.055	2.8	50	10	421
LCMF4520P1-701-2P	700 Typ.	0.059	2.4	50	10	701
LCMF4520P1-901-2P	900 Typ.	0.060	2.3	50	10	901
LCMF4520P1-102-2P	1000 Typ.	0.068	2.1	50	10	102
LCMF4520P1-122-2P	1200 Typ.	0.074	2.0	50	10	122
LCMF4520P1-142-2P	1400 Typ.	0.081	1.9	50	10	142