


Toroidal Coil



- RoHS Compliant
- Operating Temperature -40°C to +85°C

Electrical Specifications @25	
OCL:	PIN 1-2= 4.7mH ±30% @ 10KHz/0.1V
	PIN 4-3= 4.7mH ±30% @ 10KHz/0.1V
D.C.R.	PIN 1-2 = 900 mohm Max.
	PIN 4-3 = 900 mohm Max.
Crossed Response:	±0.2dB@10MHz
Turn Ratio:	PIN1-2 : PIN 4-3 = 1±2% :1
Hi-pot:	PRI. – SEC. =750VAC/2Seconds/1mA

Dimensions

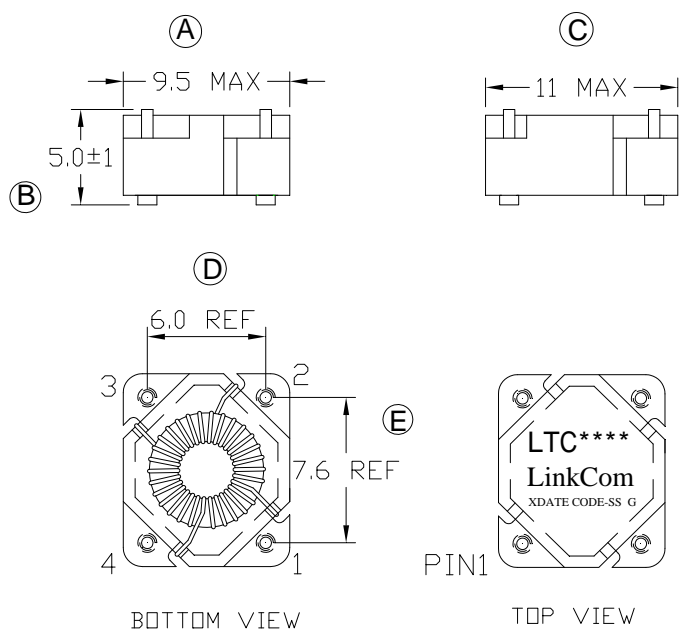

Schematic

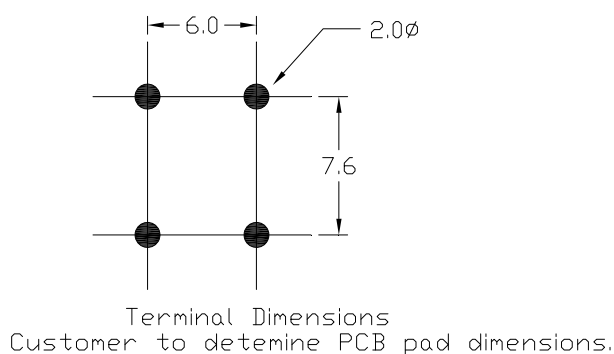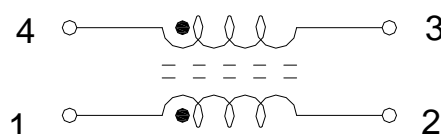

Mark:

- 1.LTC****----LTC0265
2. X----PRODUCT LINE or BLANK
3. DATE CODE----YYWW
- 4.SS--52
5. G----RoHS

(Units: mm, Unless otherwise specified, all tolerances are ±0.25)