

Toroidal Coil

- RoHS Compliant
- Operating Temperature -40°C to +85°C
- 600 mA of rated current for $\Delta T=40$ K




Electrical Specifications @25°C

Inductance:	PIN 1-2= 4.7mH +50%/-30% @ 10KHz/0.1V
	PIN 4-3= 4.7mH +50%/-30% @ 10KHz/0.1V
D.C.R.:	PIN 1-2 = 900 mohm Max.
	PIN 4-3 = 900 mohm Max.
Hi-POT:	PRI. – SEC. =500VAC/2Seconds/1mA
Turn Ratio:	PIN1-2 : PIN 4-3= 1±2% :1

Dimensions

(Units: mm, Unless otherwise specified, all tolerances are ± 0.25)

Schematic

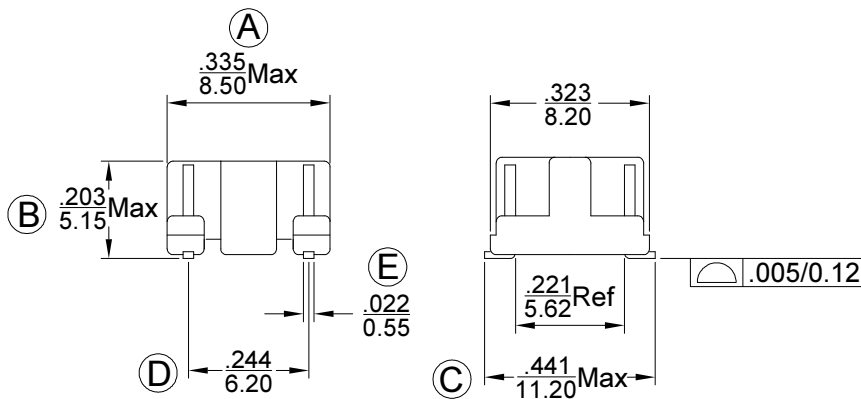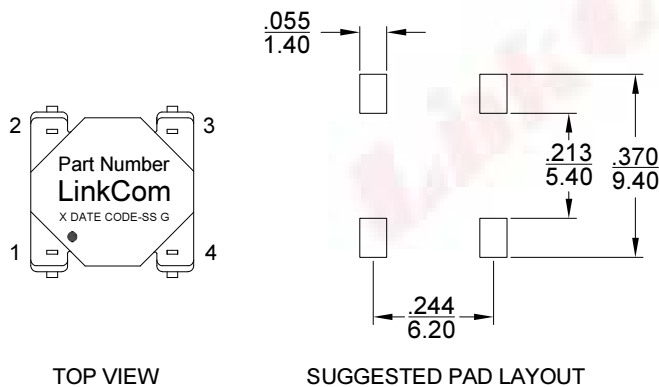

Mark

1. Part Number----LTC0060
2. X----PRODUCT LINE or BLANK
3. DATE CODE----YYWW
4. SS----53 OR BLANK
5. G----RoHS

Package info

LTC0060-53R—Tape Reel