

Common Mode Filter


- RoHS Compliant
- Operating Temperature -40°C to +85°C

Electrical Specifications @25°C	
Inductance:	PIN 1-4 = 26uH ±10%. @ 100kHz/0.1V/Series
D.C.R	PIN 1-4 = 275 mohm Max.
	PIN 5-8 = 250 mohm Max.
Turn Ratio:	PIN 1-4 : PIN 5-8 = 1.1±2% : 1
Hi-POT	PRI. – SEC. = 500VAC/60Hz/2Sec/1mA


Dimensions

(Units: $\frac{\text{Inches}}{\text{mm}}$, Unless otherwise specified, all tolerances are $\pm\frac{.010}{0.25}$)



Schematic



TOP VIEW



SUGGESTED PAD LAYOUT

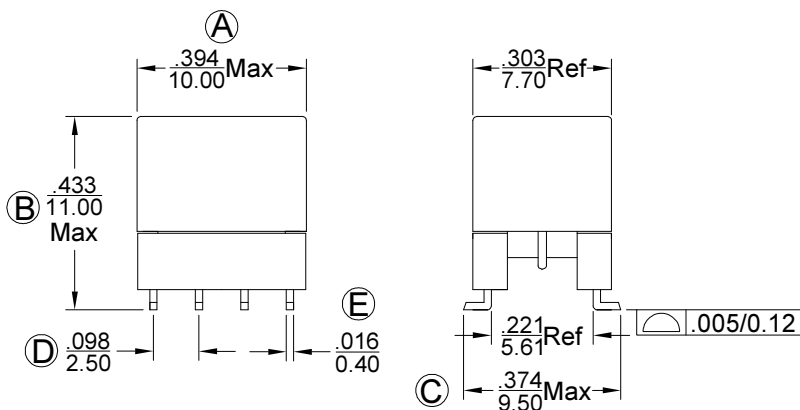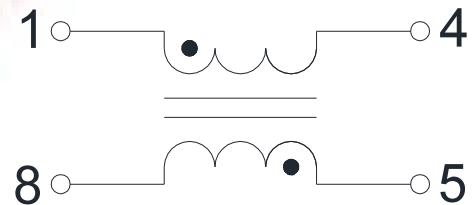

Mark

1. Part Number----LLF0138
2. X----PRODUCT LINE OR BLANK
3. DATE CODE----YYWW
4. SS----50 OR BLANK
5. G----RoHS

Package info

LLF0138-50R - Tape Reel