

DC/DC Transformer





- Forward transformer for PoE applications
- RoHS Compliant
- Operating Temperature -40°C to +85°C

Electrical Specifications @25°C


Inductance:	PIN 1,2-3,4 = 95uH $\pm$ 10% @ 100kHz/0.1V (PIN1,2 shorted & 3,4 shorted)
Leakage Inductance:	PIN 1,2-3,4 = 2.2uH Max. @ 100KHz/0.1V (PIN1,2 shorted & 3,4 shorted ; 7,8,9,10,11,12 Shorted)
D.C.R	PIN 1,2-3,4 = 258 mohm Max. (PIN1,2 shorted & 3,4 shorted)
	PIN 5-6 = 400 mohm Max.
	PIN 7,8,9-10,11,12 = 10 mohm Max. (PIN 7,8,9 shorted & 10,11,12 Shorted)
Turn Ratio:	PIN 1,2-3,4 : PIN 5-6 = 1.58 $\pm$ 3%:1 (PIN1,2 shorted & 3,4 shorted)
	PIN 1-3 : PIN 7,8,9-10,11,12 = 6.00 $\pm$ 3%:1 (PIN1,2 shorted & 3,4 shorted ; 7,8,9 shorted & 10,11,12 Shorted)
Hi-POT :	PRI. – SEC. = 1500VAC/60Hz/2Sec/1mA

Dimensions

(Units: $\frac{\text{Inches}}{\text{mm}}$, Unless otherwise specified, all tolerances are $\pm \frac{.010}{0.25}$)

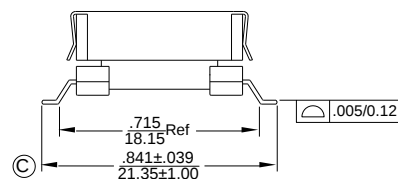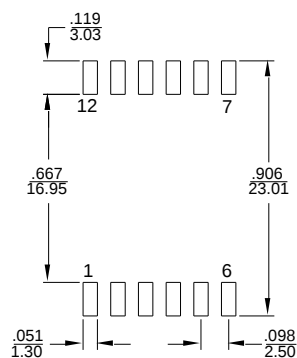

Schematic

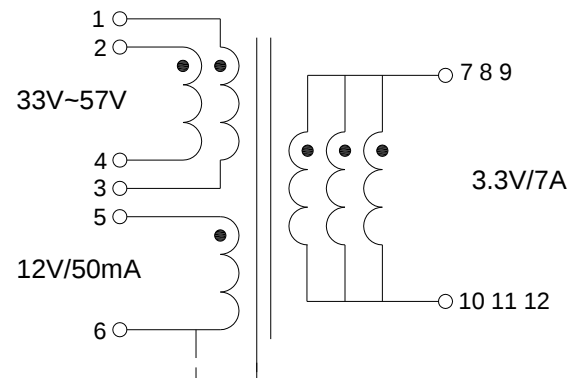

Mark

1. Part Number----LDT0875
2. X----PRODUCT LINE or BLANK
3. DATE CODE----YYWW
4. SS----56 or BLANK
5. G----RoHS

Package info

LDT0875-56R - Tape reel