

SPECIFICATION FOR APPROVAL

CUSTOMER: _____

MODEL NO. : _____ QI2QT-7461 _____

PART NO. : _____

MODEL NAME: _____ QI2 2-in-1 wireless charging _____

REVISION: _____ A1 _____

DATE: _____

APPROVED SIGNATURES

APPROVED SIGNATURES		

LinkCom®

- ☐ 联宝电子股份有限公司
☐ 东莞联宝光电科技有限公司
☒ 深圳联骅电子科技有限公司
☐ LinkCom USA, Inc.
☐ 其他

(Taiwan Headquarter)

5F., No.127, Ln. 235, Baoqiao Rd., Xindian Dist, New Taipei City 231 ,Taiwan(R.O.C.)

Tel: (886) 2-8919-1380

Fax: (886) 2-8919-1370

E-mail: sales@linkcom.com.tw

(China Plant)

Technology Industrial Park Chi-Shi Town Dong Guan City China

Tel: (86-769) 8678-6368

Fax: (86-769) 8678-8988

E-mail: sales@linkcom.com.tw

Model No.	QI2QT-7461	Model Name	QI2 2-in-1 wireless charging
Part No.		Size	90*85*150mm

Product Specification

产品规格书

Product name/产品名称:

Qi2二合一无线充

Model No/ 产品型号:

QI2Qt-7461

File number /文件编号:

Revision/版本号:

A1

Date/日期:



APPROVED BY 批准	CHECKED BY 审核	DESIGNED BY 制作

Model No.	QI2QT-7461	Model Name	QI2 2-in-1 wireless charging
Part No.		Size	90*85*150mm

目录

1. Scope/概述	5
2. Product Characteristic/产品特点	5
3. Performance Parameter/性能参数	5
4. Security mechanism//安全机制	6
5. Reliability Requirements / 可靠性要求	7
5.1 Burn-in 老化	7
6. Environment Requirement / 环境要求	7
7. Execution Standards/执行标准	7
8. Attentions 使用注意事项	7
9. Size 尺寸	8
10.Weight 重量	8
11. Statement / 声明	8



Model No.	QI2QT-7461	Model Name	QI2 2-in-1 wireless charging
Part No.		Size	90*85*150mm

Reversion History / 更新记录

Revision	Date	Changes
A0	2023-12-19	初版发行
A1	2024-4-10	新增 2.1 Product accessories 产品配件

Model No.	QI2QT-7461	Model Name	QI2 2-in-1 wireless charging
Part No.		Size	90*85*150mm

1. Scope/概述

QI2QT-7461 is the latest two in one product of QI2 wireless charging and Apple earphone wireless fast charging, which supports PD adapter 15V/3A power supply; The latest QI2 wireless charging can support the wireless fast charging function of the magnetic suction series mobile phones, which is in line with WPC_ Qi 2.0 certification standard

QI2QT-7461是最新款QI2无线充+苹果耳机无线快充的二合一产品，该产品支持PD适配器15V/3A供电；最新款QI2无线充可支持磁吸系列手机无线快充功能，符合WPC_Qi-2.0认证标准.

2. Product Characteristic/产品特点

- ◆ Supports I Phone series magnetic phones
支持I Phone系列磁吸手机
- ◆ Supports I Phone series magnetic phones
支持苹果耳机无线充电
- ◆ Equipped with a powerful magnet to attach the phone
内置强力磁铁吸附手机.
- ◆ 5V 1A USB output support one device wired charging.
5V 1A USB 输出支持 1 支设备有线充电

2.1 Product accessories 产品配件

料号 Part number	产品叙述 Description	图片 Photo	备注 Remarks
UNIPA-2175	PD 45W Adapter		
UNICB-7249	1M Type C to C Cable		
UNITD-7312	Plating Black Metal Ring		

3. Performance Parameter/性能参数

3.0	Power input protocol/电源输入协议	PD 2.0/3.0
3.1	Wireless charging protocol/无线充协议	BPP + MPP (Qi 2.0)
3.2	Input power /输入功率	15V/2.5A
3.3	MPP wireless charging output /MPP 无线充电输出	MPP-15W/ BPP-5W/7.5W apple fast charge
3.4	Wireless charging output of headphones 耳机无线充电输出	BPP-5W Max

Model No.	QI2QT-7461	Model Name	QI2 2-in-1 wireless charging
Part No.		Size	90*85*150mm

3.5	Standby Power for MPP module /待机功率	< 350mW
3.6	Power Transfer Efficiency/转换效率	75%±5%
3.7	Qi2 Operating frequency / Qi2 工作频率	BPP mode:128KHz MPP mode:360KHz
3.8	Headphone charging frequency/耳机充电工作频率	BPP mode:110-205KHz
3.9	USB-A output /USB-A 输出	5V/1A Max
3.10	Protections / 保护	OVP /UVP /OCP /OTP
3.11	Magnetism for MPP module / MPP 模块磁力	900gf±5%
3.12	Wireless charging indicator light for headphones 耳机无线充指示灯	Blue light on: charging 蓝灯亮:充电中 Red light flashing: FOD/abnormal operation 红灯快闪: FOD/工作异常
3.13	Indicator light function/指示灯功能	Reserved (without indicator lights) 有预留(无指示灯)

4. Security mechanism//安全机制

4.1 MPP-15W transmitter protection mechanism /MPP-15W 发射端保护机制

4.10	Protections / 保护	OVP /UVP /OCP /OTP
4.11	Input OVP/输入过压保护	9V input:Trigger:10V/ recover:9.5V 5V input:Trigger:5.6V/ recover:5.4V
4.12	Input UVP/输入欠压保护	9V input:Trigger:7.5V/ recover:8.5V 5V input:Trigger:4.2V/ recover:4.5V
4.13	Input over current protection/输入过流保护	5A Max
4.14	Over Temperature Protection/过温保护	Trigger:72℃/ recover:55℃
4.15	FOD function/异物检测功能	Q test(pre-power transfer)/Power Transfer FOD

4.2 BPP-5W transmitter protection mechanism /BPP-5W 发射端保护机制

4.20	Protections / 保护	OVP /UVP /OCP /OTP
4.21	Input OVP/输入过压保护	≥13.0V
4.12	Input UVP/输入欠压保护	≤4.4V
4.13	Input over current protection/输入过流保护	2.2A Max
4.14	Over Temperature Protection/过温保护	Trigger:65℃/ recover:45℃
4.15	FOD function/异物检测功能	Stop output, red light flashing 停止输出,红灯闪

Model No.	QI2QT-7461	Model Name	QI2 2-in-1 wireless charging
Part No.		Size	90*85*150mm

5. Reliability Requirements / 可靠性要求

For other tests, please refer to Reliability Test Specification and Reliability Test Report.

其他测试请参考《可靠性测试规范》与《可靠性测试报告》

5.1 Burn-in 老化

Burn-in for 2hours under 35°C(±5°C), Nominal input voltage, Nominal load.

在 35°C(±5°C)的环境下，额定输入电压，额定负载，老化 2 小时

6. Environment Requirement / 环境要求

6.1. Operating Temperature and Relative Humidity 操作温度和相对湿度

0°C-35°C 20%RH to 80%RH

6.2. Storage Temperature and Relative Humidity 储存温度和相对湿度

-20°C to +40°C 10%RH to 90%RH

7. Execution Standards/执行标准

7.1. EMC Standards 电磁兼容标准

EN55032	EN55035
---------	---------

8. Attentions 使用注意事项

8.1 Please use the correctly configured PD adapter and the output power is higher than 45W to ensure proper functionality.

请使用配置的正确规格 PD 适配器，建议输出功率大于 45W，确保保证功能正常


8.2 MPP TX module can adjust the maximum output power according to the capability of the PSU as below

MPP 模块会根据适配器不同输出能力调整输出功率，适配器输出规格对应 MPP 模块表格如下：

PSU Type	Output power
DC >=20W (9V/2.22A)	BPP5W/AFC7.5W/MPP15W
DC >=12W (5V/2.4A)	BPP5W/AFC7.5W/MPP7.5W
QC 18W (9V/2A)	BPP5W/AFC7.5W/MPP10W
QC 15W (9V/1.67A)	BPP5W/AFC7.5W/MPP10W
PD >=20W (9V/2.22A)	BPP5W/AFC7.5W/MPP15W
PD 18W (9V/2A)	BPP5W/AFC7.5W/MPP12W
PD 15W (5V/3A)	BPP5W/AFC7.5W/MPP7.5W
BC1.2 12W	BPP5W/AFC7.5W/MPP7.5W

Model No.	QI2QT-7461	Model Name	QI2 2-in-1 wireless charging
Part No.		Size	90*85*150mm

9. Size尺寸: ($\pm 1.0\text{mm}$)

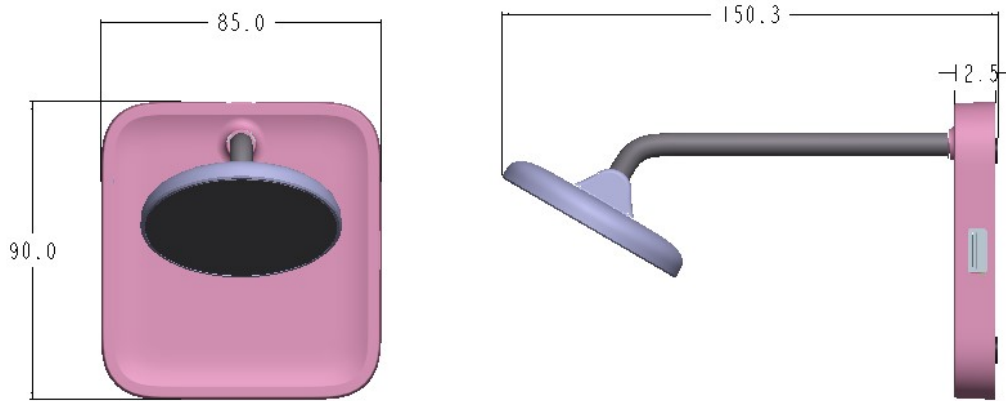

10. Weight

重量

70 $\pm$ 5g

11. Statement / 声明

All rights reserved by LinkCom Manufacturing Co., Ltd. for all of this specification for approval.
About warranty, please refer to LinkCom company warranty policy.
