

xDSL Transformer

- Designed to meet UL 60950-1 and IEC 60950-1 requirements for supplementary insulation
- RoHS Compliant
- Operating Temperature -40°C to +85°C



Electrical Specifications @25°C

Inductance	PIN 1-4 = 400uH $\pm 7\%$ @ 10KHz/0.1V/Series (PIN 2-3 Short)
Leakage Inductance	PIN 1-4 = 850nH Ref. @ 1MHz/0.1V (PIN 2-3, PIN 7-8-9-10 Short)
T.H.D	PIN 1-4 to PIN 10-7= -88dB Max. @ 30KHz/3V (PIN 2-3,PIN 8-9 Short)
D.C.R	PIN 1-4 = 1.50 ohm Max. (PIN2-3 short)
	PIN 10-7 = 1.25 ohm Max. (PIN8-9 short)
Turn Ratio:	PIN 1-4 : PIN 10-7 = 2.0 $\pm 2\%$: 1 (PIN2-3,PIN8-9 Short)
Hi-POT :	PRI. – SEC. =1875VAC/60Hz/1Second/1mA

Dimensions

(Units: $\frac{\text{Inches}}{\text{mm}}$, Unless otherwise specified, all tolerances are $\pm \frac{.010}{0.25}$)

Schematic

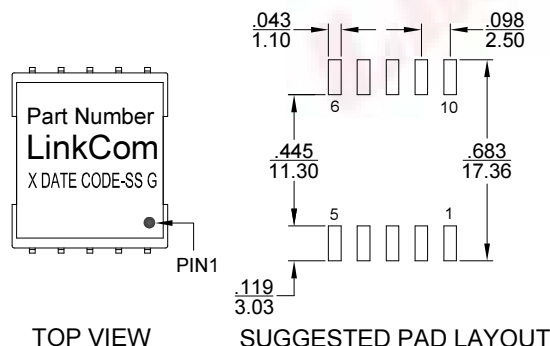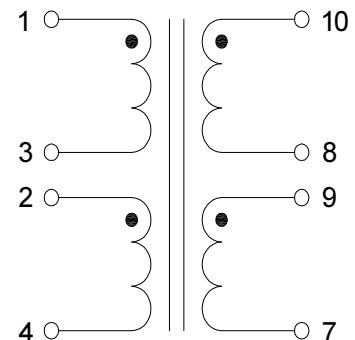

Mark

- 1.Part Number----LAL0562
2. X----PRODUCT LINE OR BLANK
3. DATE CODE----YYWW
- 4.SS----50 OR BLANK
5. G----RoHS

Package info

LAL0562-50R—Tape Reel